


Vintage Audio

MSL-MK2

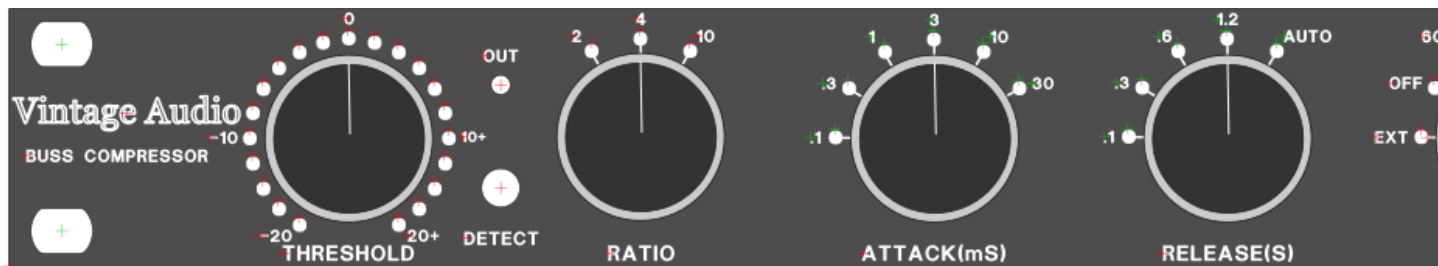

Quad VCA Buss Compressor

Vintage Audio

MSL-mk2 Quad VCA Compressor



Congratulations on your purchase of your new Vintage Audio MSL-mk2 Quad VCA Buss compressor.

The MSL-mk2 is based on the standard of Quad VCA Buss compressors and Rivals the finest designs. These wonderful sounding compressors provide the “Glue” needed for great mixes as well as wonderful drum buss compression. Our design uses High Performance Burr Brown input and output stages for clean audio with great headroom and wide bandwidth.

We put tremendous effort into all of our preamps and compressors to make your music more enjoyable and your sessions less droll. Each unit is hand built to our specifications and is constructed of nothing but the highest quality parts. As with all of our units, the MSL uses remote relay switching which shortens the signal path, lowers noise and provides a True Bypass. Excellent filtering is also provided to lower ripple and thus lower the noise floor even further making them extremely quiet in terms of self noise.

Caution!

As with all professional equipment, please be sure to read all necessary literature prior to hooking devices up and powering them on. All units are set for voltage based on the original sale destination. Please consult the tag below the AC inlet if you purchased a unit “used” or second hand to make sure it is set for the right voltage before applying AC voltage.

About Vintage Audio

Vintage Audio is made by the same great techs at Revive Audio who perform modifications on countless preamps, compressors and other processors in the recording industry.

We have been building pro audio gear for decades and have a real passion for offering affordable, extremely well made preamps, EQs and compressors to the Pro audio community.

We have a lot of experience on what it takes to make an excellent sounding preamp or compressor. We hand select all of our components, pieces and parts based on the character they impart and reliability. Most parts are Mil Spec, are designed to last and provide years of unparalleled performance.

All of our designs are set up to be extremely simple to use and obtain great results.

On to the good stuff!

So about your new compressor

+

The Vintage Audio **MSL-mk2** is a stereo channel VCA buss compressor with a familiar architecture that is a must have for seriously pro sounding mixes. The **MSL-mk2** utilizes dual RMS detection, dual VCA compression and provides all of that great “glue” needed at mix down.

The **MSL-mk2** has a selectable Ratio, Attack, Release, and Sidechain input with frequency selections that we found to be most useful to mix engineers. The frequencies range from 60Hz to 440Hz. We found that 440Hz, while not very useful on the Mix Buss, is a useful function for tracking and mixing instruments like piano or other percussion instruments.

Compression character and quality is one of the main reasons engineers reach for a certain comp to do the job.

The **MSL-mk2** has two different detection circuits to choose from and therefore two different compression characters. You will most likely find yourself leaving it in normal mode, but we have incorporated the Detect Out feature to remove one of the RMS Sidechain circuits. This feature provides great character and an aggressive compression. The feature is nice for effects, squashing room mics or other sources that simply need to be aggressively tamed.

Sometimes it is hard to tell exactly what is happening to the program material when using subtle compression. Our True Bypass is a perfect solution, it routes the input directly to the output completely bypassing the compressor and all line amp stages.

A vintage Style VU Meter illuminates the front panel and dances to the music! The Vu meter selector allows you to choose: Input, Output and Aggregate Gain Reduction.

The design is very simple and easy to use to obtain excellent results.

In the next section you will find a list of all controls to help you get started.

Front Panel Controls Overview



True Bypass: The MSL features a true relay bypass that effectively routes the input to the output bypassing the circuit completely. This is a nice feature when you simply need an accurate reference.

Sidechain Select: The Sidechain selection control allows the user to choose from: External sidechain input, no sidechain filter and sidechain frequencies 60, 90, 150, 240, 440HZ. This effectively reduces the amount of compression sensitivity one hears at the selected frequency.

Meter Select: Here the user can select to see the Left and Right input levels and the aggregate compression for both left and right channels.

Ratio Select: The Ratio control allows the user to select from: 2:1, 4:1, 10:1 compression ratios

Attack Select: The attack controls selects the attack time of the compressor. The user can select from: .1, .3, .5, 1, 3, 10, 30mS

Release Select: The release control controls the release time of the compressor and allows the user to select from: .1, .3, .5, 1.2, AUTO (Sec)

VU Meter: Allows viewing of the input, output and aggregate compression levels for both Left and Right channels.

RMS Detector bypass: This switch when engaged allows the user to remove one of the RMS detectors from the sidechain circuit. This is a nice feature when you want some aggressive compression from the MSL. Most often you will find you do not use this feature but is nice to have when creating unique compressed sounds.

Make-up Gain Control: This control provides the user with 20db of make-up gain after compression

Threshold Control: This unit when set to 12 o'clock is effectively 0db. Rotating the Threshold control counter clockwise increases the amount of compression and vice-a-versa.

Power: Power to the User!

Back Panel Overview



Input: Signal input for left and right channels

Outputs: Signal output for left and right channels

External Sidechain Input: This is where external sidechain signals are inputted. The sidechain selector must be set to external for the MSL to receive external sidechain input.

AC power inlet: Simply plug in the provided AC cable and away you go.

Specifications

Input Impedance: 600 Ohm

Output Impedance: 600 Ohm

Frequency Response: 20-20Khz+/- 1db

Gain: 20 db of total gain at full input no limiting

Noise Floor: <105 Dbm

Attack Times: Variable times of: .1, .3, .5, 1, 3, 10, 30mS

Release Times: Variable times of .1,.3,.5,1.2, AUTO (Sec)

Fuse: 250V Slow Blow 5x20mm, 800ma (120vac), 400ma (240vac).

Dimensions: 19x3.5x12 inches

Weight: 15 lbs boxed

Note: Mains voltages are set when the unit is constructed. All units are wired for their Destination.

The Serial label contains information on what voltage the unit is wired for as well as the correct 250v fuse rating.

DO NOT CONNECT AC MAINS IF THE VOLTAGE LISTED ON THE LABEL IS DIFFERENT THAN YOUR LOCAL MAINS VOLTAGE!

Vintage Audio

All Vintage Audio products come with a full three Year warranty against defect and are built to the highest standard.

For more info on this or other Vintage Audio products or to request service please see us at ReviveAudio.com

Again, Thanks for your purchase!

We are confident that you will enjoy your new Vintage Audio unit for years to come.

Hand Made in the USA

Vintage Audio by Revive Audio

Caldwell, ID

83605

208-473-2245

Copy write 2017